


SP80-ER16

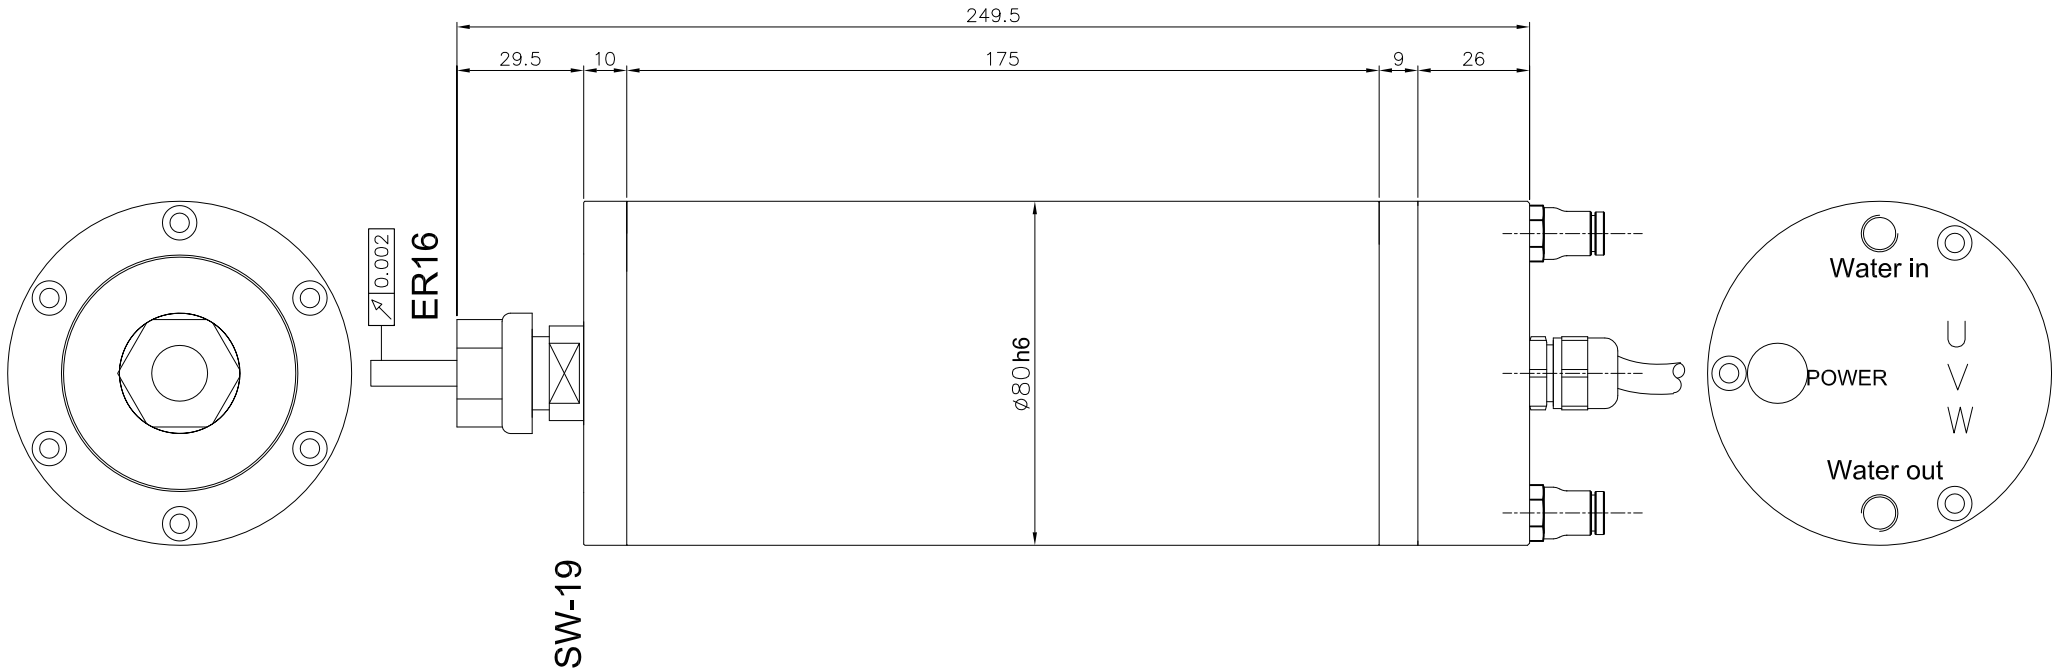

BEARING TYPE : 7005C P4*2 7003C P4*2
 BEARING PRELOADING : SPRING

NUMBER OF MOTOR POLES : 2
 MOTOR RATED VOLTAGE : 200V
 MOTOR RATED SPEED : 11800rpm
 MOTOR RATED CURRENT : 3A
 MOTOR RATED FREQUENCY : 200HZ
 MOTOR POWER : 1.5KW

Specification	Units
Maximun Speed (最高轉速)	24000-30000 R.P.M
Maximun Dynamic Runout (偏擺精度)	0.01 mm
Cooling Water Flow Rate (冷卻水流量)	56.9 IMP(L/Hour)
Cooling Water Inlet Temperature (冷卻水進入溫度)	18~22 °C
Axial Failure Load (Push) (軸向承受壓力)	25 kgf
Body Size (外部尺寸)	80 mm (h6)
Weight (重量)	NN kg